
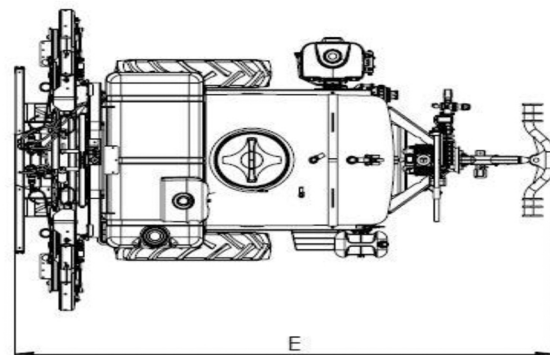
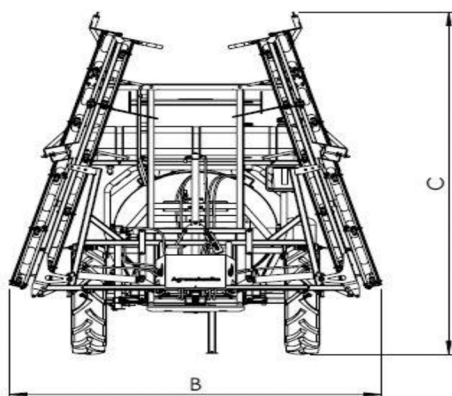


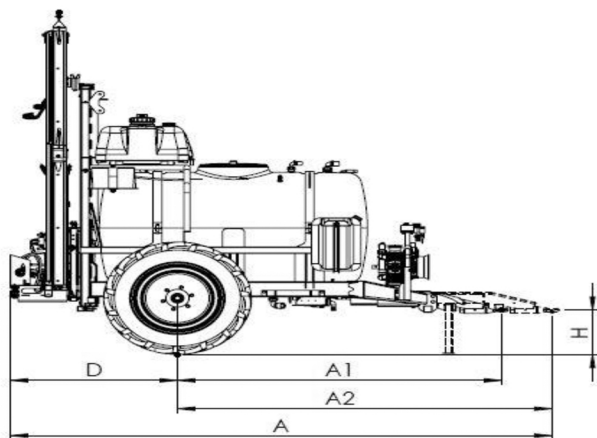

GARNITURA			TIP GARNITURE				
			10MRX	12MRX	15MRX	12MY	12MY-H
Delovna širina	[m]		10	12	15	12	12
Nosilci šob TRI-GET	[kos]		20	24	30	24	24
Število sekcij			5	5	5	5	5
Razdelitev šob po sekcijah			3-5-4-5-3	3-2-5-4-5-2-3	3-3-6-6-6-3-3	3-2-5-4-5-2-3	3-2-5-4-5-2-3
Višina dviga	[cm]		50-165	50-165	50-165	50-165	50-165
Upravljanje			ročno	ročno	ročno	hidravlično	hidravlično
Masa garniture (komplet)	[kg]		145	150	170	268	302
AGS 1500 EN			10MRX	12MRX	15MRX	12MY	12MY-H
Dimenzije (z garnituro)	Dolžina	A[cm]	340	340	340	344	374
	Širina	B[cm]	241,5	241,5	300	257	257
	Višina	C[cm]	250	250	245	305	310
	Razd. od osi do konca	D[cm]	83	83	84	80	115
	Dolžina s prečko	E[cm]	290	290	300	285	350
Transportni položaj (višina)	[cm]		250	250	245	305	305
Masa škropilnice in garniture (prazna)	[kg]		772	777	797	920	954
Masa škropilnice in garniture (polna)	[kg]		2487	2492	2512	2620	2670
Oсна obremenitev (polna)	[kg]		2139	2143	2160	2410	2454
Obremenitev priklopa (polna)	[kg]		348	349	352	210	216